

SDI Redundant Input

Automatically switches over if main SDI input is lost.

Multi Rate Support

Auto detection of SD, HD or 3G-SDI


Updates and Configuration

USB

Reclocking

Yes

SD, HD

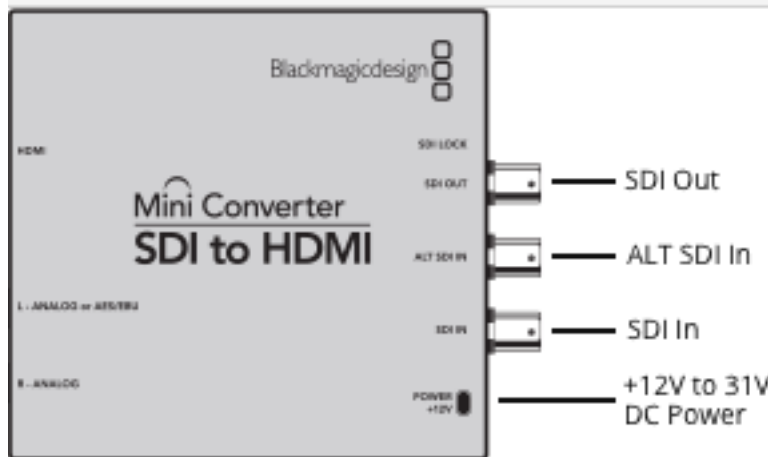

SDI Video Rates

SDI video connections are switchable between standard definition, high definition level B 3G-SDI.

SDI Video Sampling

4:2:2 and 4:4:4

SDI Audio Sampling

Television standard sample rate of 48 kHz and 24 bit.

SDI Color Precision

4:2:2 and 4:4:4

SDI Color Space

YUV and RGB

SDI Auto Switching

Automatically detects SD, HD or 3G-SDI.

HDMI Format Support

625/25 PAL, 525/23.98 NTSC, 525/29.97 NTSC, 720p50, 720p59.94, 720p60, 1080i50, 1080i59.94, 1080i60, 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60, 2048 x 1080p23.98, 2048 x 1080p24, 2048 x 1080p25

HDMI Color Space

YUV and RGB

HDMI Color Precision

4:2:2 and 4:4:4

Internal Software Upgrade