


TLM-404H Quick Start Guide

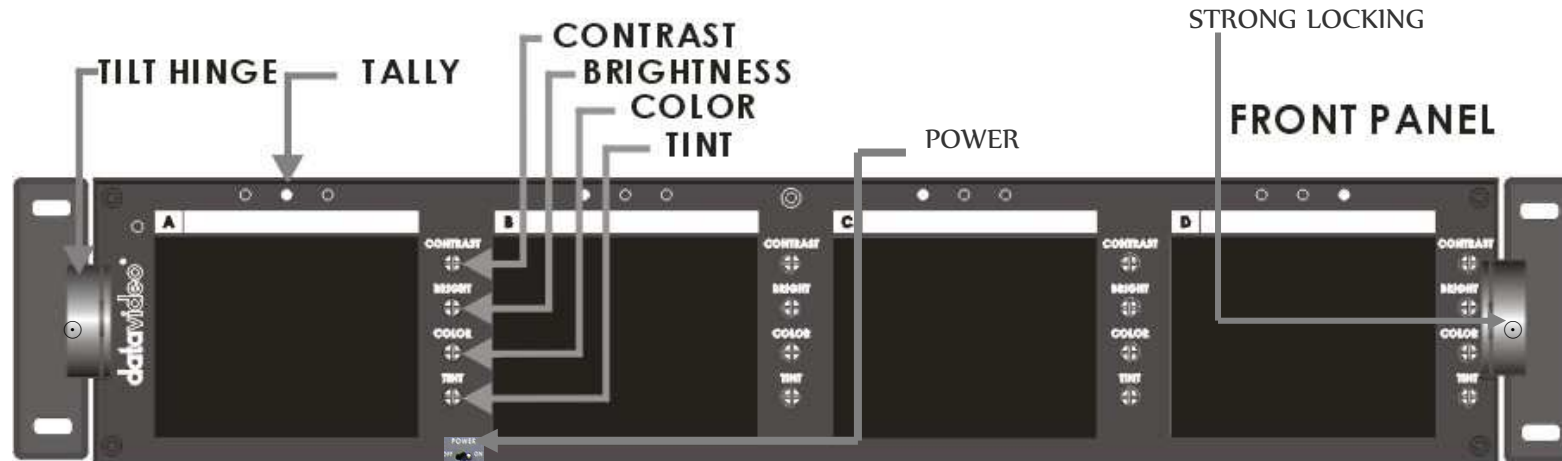

General:

The Datavideo TLM-404H has 4x4" High quality TFT LCD monitors. Its 2U height design is ideal for standard 19" rack mount applications. The units inputs automatically recognize NTSC & PAL video signals. The tilt hinges allow you tilt the screen +/- 30 degrees for optimum viewing. Each LCD panel has controls for contrast, brightness, colour and tint (Tint only available for NTSC). A 9pin Sub D AUX input is reserved on each panel for future use and possible connection of cabling from SDI or DV converters.

Specifications:


- | | |
|--------------------------|--|
| ● LCD Display | 4" TFT LCD active matrix |
| ● Resolution | 960 R,G,B x 234 |
| ● Aspect Ratio | 4:3 |
| ● Brightness (luminance) | 350 cd/m ² |
| ● Video Input | Composite (CV) 1.0 Vp-p, 75 Ohm BNC |
| ● Video Output | Composite (CV) Loop-through, 75 Ohm BNC |
| ● Video System | NTSC/PAL auto recognition |
| ● Tally Indication | Three Colour Tally LED indicators |
| ● Power Consumption | DC12Volt. 50W. |
| | 35W for LCDs display, 15W for Aux Adaptor |
| ● Dimension | 3.5" x 2.8" x 19" (H x D x W), 2U Rack space |

AUX INPUT: D Sub 9 pin connector on the rear panel. This provides an external video input with input select interface and power supply. It is reserved for future use with an external connector such as an SDI or DV input adaptor.

TALLY INPUT: D Sub 15 pin connector on the rear panel. It works by closing contacts between a ground pin and the corresponding LED pin as shown in the following pin out table. Do not give power to the pins as the unit will supply power.

AUX INPUT	
Pin 1, 6	DC 12 Volt, 0.25 Amp Output
Pin 5, 8, 9	Ground
Pin 4	External Composite Video Input: 1.0 Vp-p 75 Ohm
Pin 7	Switch Input TTL Level, External Video Input = +5v

TALLY INPUT			
Tally color	Green	Red	Yellow
Monitor A	Pin 1	Pin 2	Pin 3
Monitor B	Pin 6	Pin 7	Pin 8
Monitor C	Pin 11	Pin 12	Pin 13
Monitor D	Pin 5	Pin 10	Pin 15
Pin 4, 9 and 14 are Common Ground			

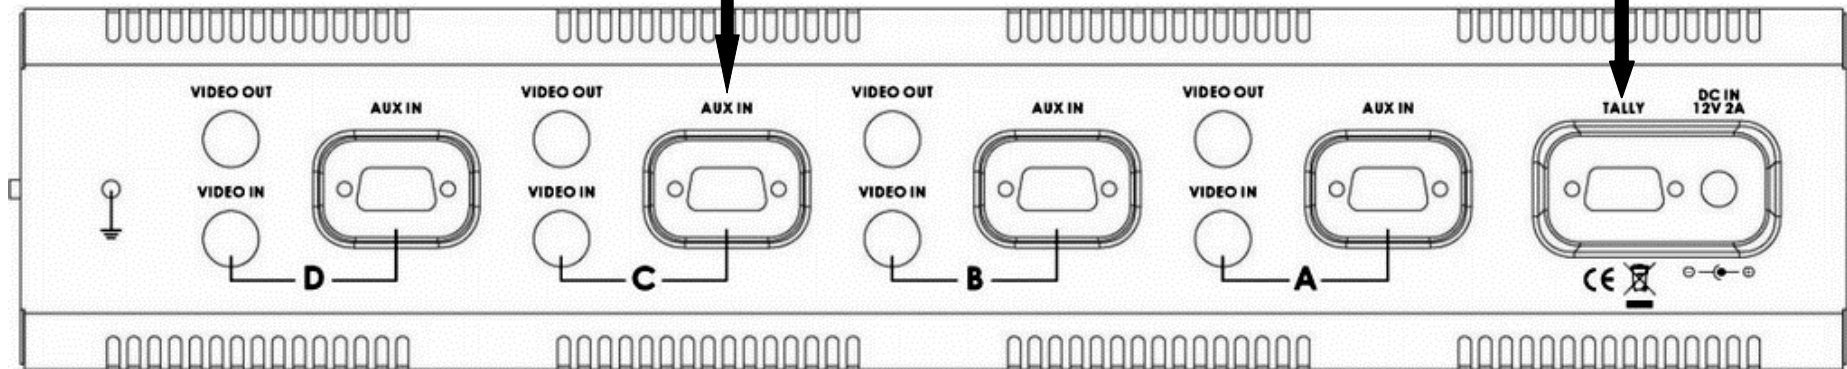

Service & Support

It is our goal to make your products ownership a satisfying experience. Our support staff are available to assist you in setting up and operating your system. Please refer to our web site www.datavideo-tek.com for answers to common questions, support requests or contact your local office below.

Datavideo Global Website: www.datavideo-tek.com

Datavideo Corporation

Tel: +1 562 696 2324	Fax: +1 562-698-6930	E-Mail: contactus@datavideo.us		Tel: +31-30-261-96-56	Fax: +31-30 261-96-57	E-Mail: service@datavideo.nl
----------------------	----------------------	--	--	-----------------------	-----------------------	--

Datavideo Technologies Europe BV

Datavideo UK Limited

Tel: +44 1457 851 000	Fax: +44 1457 850 964	E-Mail: sales@datavideo.co.uk		Tel: +886 2 8227 2888	Fax: +886-2-8227-2777	E-mail: service@datavideo.com.tw
-----------------------	-----------------------	--	--	-----------------------	-----------------------	--

Datavideo Technologies Co., Ltd

Datavideo Technologies China Co., Ltd

Tel: +86 21-5603 6599	Fax: +86 21-5603 6770	E-mail: service@datavideo.cn		Tel: +65-6749 6866	Fax: +65-6749 3266	E-mail: service@datavideo.sg
-----------------------	-----------------------	--	--	--------------------	--------------------	--

Datavideo Technologies (S) PTE LTD

Datavideo HK Ltd

Tel: +852 2833 1981	Fax: +852-2833-9916	E-mail: info@datavideo.com.hk		Tel: +33 1 60 37 02 46	Fax: +33 1 60 37 67 32	E-mail: info@datavideo.fr
---------------------	---------------------	--	--	------------------------	------------------------	--

Datavideo France s. a. r. l

Datavideo Technologies India PVT Ltd

Tel: +91 120 4309120	Fax: +91 120 4309121	E-mail: sales@datavideo.in	
----------------------	----------------------	--	--

All the trademarks are the properties of their respective owners.

Datavideo Technologies Co., Ltd. All rights reserved 2012