

# T5/T8 Stick-Lite Display Lighting



## Specification

- **Outer case** Polycarbonate
- **Lamp holder** T5 G5 / T8 G13
- **Includes** Col 840 lamp  
Mounting clips  
Lamp cable 0.5m
- **Energy efficiency** A2
- **Light output ratio** 100
- **Options** DDP Colour Sleeves  
Suspension kit  
Remote ballast ECG  
Black or white end caps/cable  
1-10v Dimming for 14w, 21w and 28w only  
Not compatible with DSI or Dali Dimming




## SLT5

PART NR	WATTAGE w	LENGTH mm	LOR	Lm/W	CIRCUIT POWER W
SLT5 14w	14w	600	100	65.3	15.5
SLT5 21w	21w	890	100	72.1	23
SLT5 28w	28w	1200	100	78.2	30
SLT5 35w	35w	1500	100	78.5	38

## SLT8



PART NR	WATTAGE w	LENGTH mm	LOR	Lm/W	CIRCUIT POWER W
SLT8 18w	18w	640	100	61.0	18
SLT8 30w	30w	940	100	66.3	35
SLT8 36w	36w	1240	100	76.7	35
SLT8 58w	58w	1540	100	77.5	54
SLT8 70w	70w	1810	100	77.1	64.5

Class I and Class II dependant on ECG.

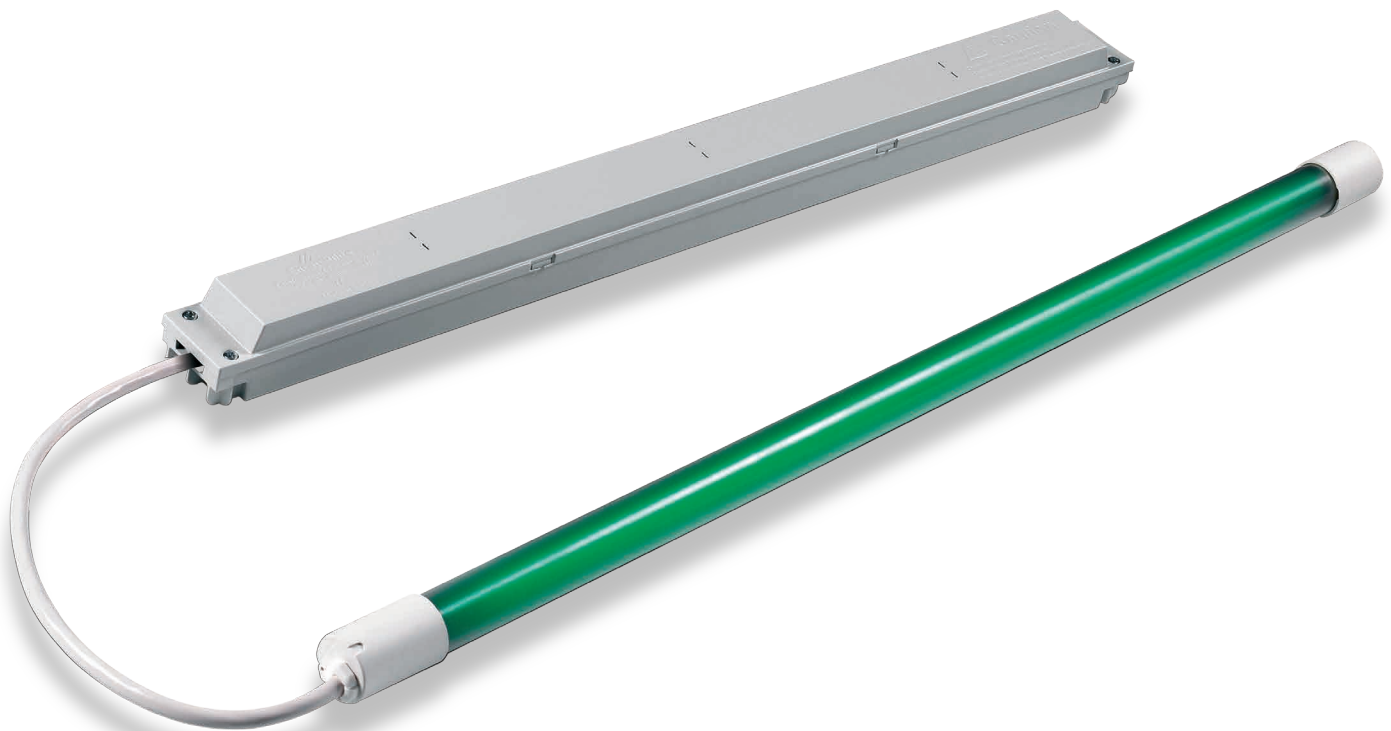

For further information or options, call to us on **01525 376974**, email [reply@encapsulite.co.uk](mailto:reply@encapsulite.co.uk) or visit [www.encapsulite.co.uk](http://www.encapsulite.co.uk)

# T5/T8 Stick-Lite Display Lighting

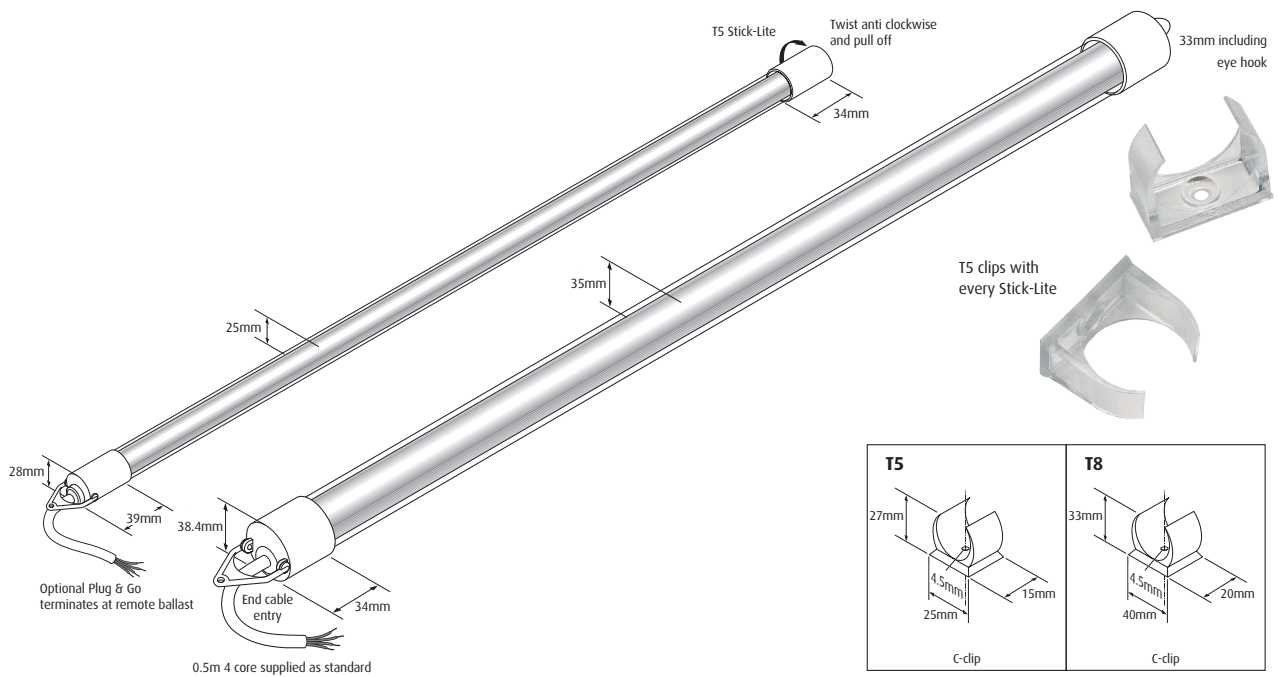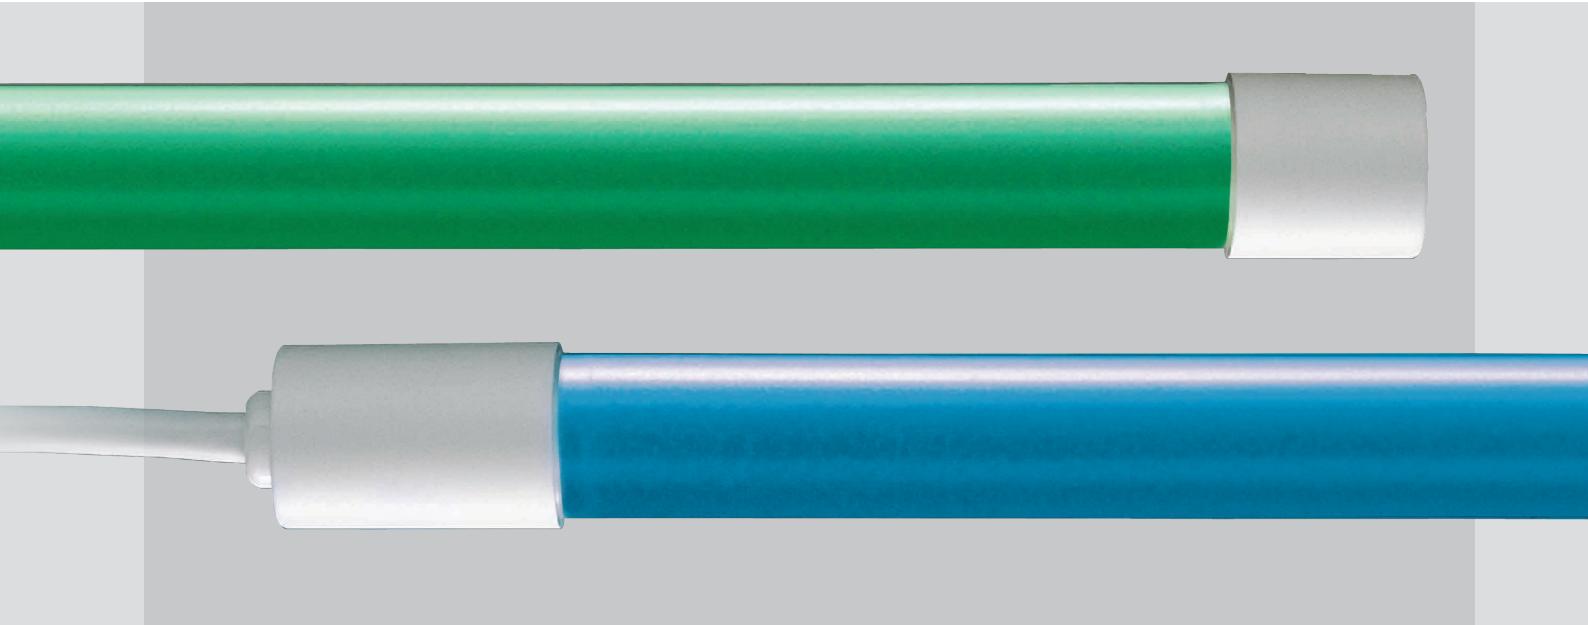

For further information or options, call to us on **01525 376974**,  
email [reply@encapsulite.co.uk](mailto:reply@encapsulite.co.uk) or visit [www.encapsulite.co.uk](http://www.encapsulite.co.uk)