

**JVC**  
**PROFESSIONAL**

21" COLOR VIDEO MONITOR

# TM-A210G

The Flexible Big-Screen Solution with  
Y/C Input and On-Screen Menu



- 21-inch Full-Square CRT with Vertical Stripe Phosphor
- NTSC and PAL Compatibility
- White Balance Adjustment
- Set Up Memory
- Control Panel Lock-Out

- More than 450 TV Lines Horizontal Resolution
- Selectable Remote System Control
  - 4:3 and 16:9 Aspect Ratios Selectable
  - Input Select

# Automatic Voltage Selection for Worldwide Application — The TM-A210G Color CCTV Monitor Delivers Exceptional Performance in a Robust and Cost-Effective Manner

JVC engineered the 21-inch Full-Square TM-A210G color monitor to deliver great pictures and to provide exceptional versatility in CCTV applications. Built to give long life and housed in a tough metal cabinet, the TM-A210G features an easy-to-use, on-screen menu for varied parameter settings. Additional features are wired remote control and audio input. Flexibility is further enhanced by an auto-voltage control system, which accepts 120V and 220 – 240V AC voltage supplies for use worldwide. Compact for easy installation, the TM-A210G is a powerful CCTV solution, featuring high performance and value in an elegant package.



Front Panel



Rear Panel




## Specifications

|                       |   |
|-----------------------|---|
| Type                  | Color video monitor   |
| Color system          | NTSC and PAL  |
| CRT                   | 21" (20"V) in-line guns, dot pitch of 0.63 mm   |
| Scanning frequency    | NTSC H: 15.75 kHz V: 60 Hz<br>PAL H: 15.625 kHz V: 50 Hz  |
| Horizontal resolution | More than 450 TV lines  |
| Power requirement     | 120V and 220V – 240V, 50Hz/60Hz   |
| Power consumption     | 1.3 A   |
| Color temperature     | 6,500°K/9,300°K (selectable)  |
| Input terminals       |   |
| 1) Input A            | Composite Video 1.0 V (p-p), 75 ohms, negative sync., BNC x 2, with auto termination for loop through                         |
| 2) Input B            | Composite Video 1.0 V (p-p), 75 ohms, negative sync., auto termination, BNC x 2, with auto termination for loop through       |
| Y/C                   | Y: 1.0 V (p-p), 75 ohms, negative sync.<br>C: 0.286 V (p-p), 75 ohms<br>DIN 4-pin x 2, with auto termination for loop through |
| Audio terminals       | RCA pin x 4 connectors for input A and input B, each with loop through  |
| Audio output          | 1W (8 cm round x 1)   |
| Remote terminal       | RCA pin x 2 connectors  |
| Weight                | 63 lbs. (28.1Kg)  |

## Dimensions

Unit: inches (mm)

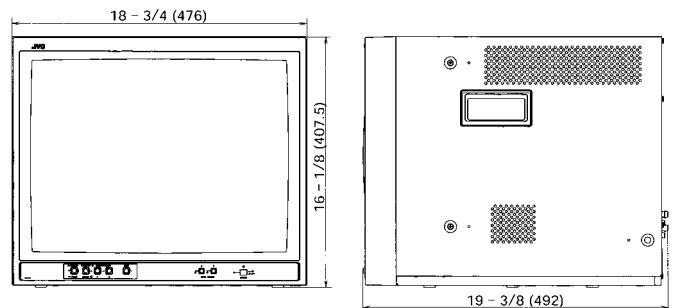

*Design and specifications subject to change without notice.*

# JVC

VICTOR COMPANY OF JAPAN, LIMITED

DISTRIBUTED BY